


# 12" x 36" Gearhead Metal Lathe

## Product Features:

- Powerful 1.5 HP motor
- Safety guard with limit switch protection
- Line interruption switch system needs a restart after a power failure
- Guideway and gears in headstock are all hardened and precision ground
- Comes complete with 6"-3 jaw chuck, 8"-4 jaw chuck, imperial and metric gears, quick change tool post, steady rest, follow rest, 10" DI-4 camlock face plate, thread chasing dial indicator, MT#3 dead center, MT#3 arbor taper, 1/2" drill chuck, full length splash guard, tool box, chuck keys and hex. keys

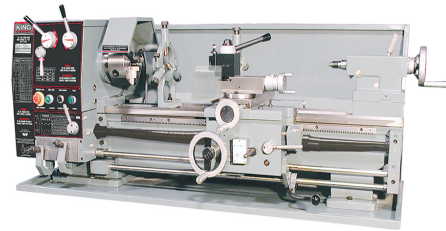

<b>MODEL</b>	<b>KC-1236ML</b>
<b>DISTANCE BETWEEN CENTRES</b>	<b>36"</b>
<b>SWING OVER BED</b>	<b>12"</b>
<b>SPINDLE BORE</b>	<b>1-1/2"</b>
<b>SWING OVER CROSS SLIDE</b>	<b>7-1/4"</b>
<b>TAPER IN HEADSTOCK</b>	<b>MT #5</b>
<b>TAPER IN TAILSTOCK</b>	<b>MT#3</b>
<b>WIDTH OF BEDWAYS</b>	<b>7-1/4"</b>
<b>TOTAL TRAVEL OF CROSS SLIDE</b>	<b>6-3/8"</b>
<b>TOTAL TRAVEL OF TOP SLIDE</b>	<b>3-3/8"</b>
<b>SPINDLE SPEEDS</b>	<b>9 (60-1,500) RPM</b>
<b>THREAD CUTTING RANGE</b>	<b>40 (4-112 TPI) 30 (.2-4.5 mm)</b>
<b>MOTOR</b>	<b>8.7 Amp.</b>
<b>VOLTAGE</b>	<b>220V, 1 Phase, 60 Hz</b>
<b>ASSEMBLED DIMENSIONS (LxWxH) / WEIGHT</b>	<b>65" x 28" x 28" / 710 lbs</b>
<b>PACKAGING DIMENSIONS (LxWxH) / WEIGHT</b>	<b>65-3/8" x 29" x 29" / 925 lbs</b>
<b>UPC</b>	<b>7 72995 00268 9</b>