


## Product Features:

- Powerful 1 HP motor
- Safety guard with limit switch protection
- Line interruption switch system needs a restart after a power failure
- Guideway and gears in headstock are all hardened and precision ground
- Comes complete with 5"-3 jaw chuck, 6-1/2"-4 jaw chuck, imperial and metric gears, 4 ways tool post, steady rest, follow rest, 8" face plate, thread chasing dial indicator, MT#3 dead center, full length splash guard, tool box, chuck key and hex.I keys

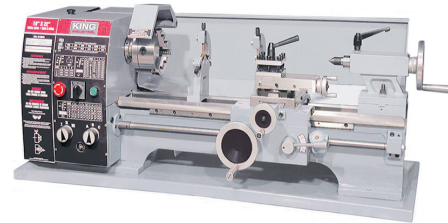

<b>MODEL</b>	<b>KC-1022ML</b>
<b>DISTANCE BETWEEN CENTERS</b>	22"
<b>SWING OVER BED</b>	10"
<b>SPINDLE BORE</b>	1"
<b>SWING OVER CROSS SLIDE</b>	6"
<b>TAPER IN HEADSTOCK</b>	MT #4
<b>TAPER IN TAILSTOCK</b>	MT #3
<b>WIDTH OF BEDWAYS</b>	6"
<b>TOTAL TRAVEL OF CROSS SLIDE</b>	6-3/8"
<b>TOTAL TRAVEL OF TOP SLIDE</b>	4-1/4"
<b>SPINDLE SPEEDS</b>	6 (150-2,400) RPM
<b>THREAD CUTTING</b>	24 (8-72 TPI) 18 (.25-3 mm)
<b>MOTOR</b>	12 Amp.
<b>VOLTAGE</b>	110V, 1 Phase, 60 Hz
<b>ASSEMBLED DIMENSIONS (LxWxH) / WEIGHT</b>	50" x 23" x 19" / 360 lbs
<b>PACKAGING DIMENSIONS (LxWxH) / WEIGHT</b>	49" x 26-3/8" x 21-3/8" / 440 lbs
<b>UPC</b>	7 72995 00276 4