




Vertical "Turret" Milling Machine (600V, 3 Phase)

Product Features:

- 5 HP, 2 speeds, variable speed drive
- Turret head swivels 360°
- "Meehanite" cast-iron and chrome ways
- Bedways are hardened and precision ground
- Centralized lubrication system
- 3 speeds power down feed

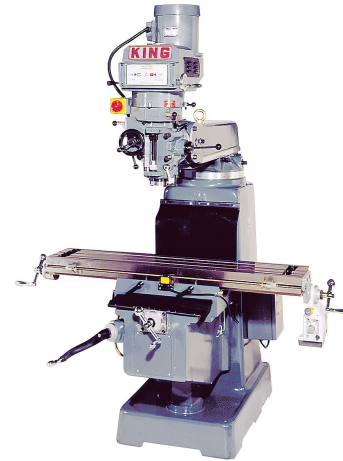

MODEL	1050VS
SPINDLE TAPER	ISO 40
QUILL POWER FEED	0.0015", 0.003", 0.006"
MAX. SPINDLE DISTANCE TO TABLE	18"
SPINDLE DISTANCE TO COLUMN	24"
TABLE SIZE	10" x 50"
SPEEDS (RPM)	(70-500 / 600-4,200)
TABLE TRAVEL	36"
SADDLE TRAVEL	16-1/2"
KNEE TRAVEL	16"
MAX. LONGITUDINAL TRAVEL	30"
CROSS TRAVEL	16-1/2"
QUILL TRAVEL	5"
RAM MOVEMENT	24"
SIZE OF T-SLOT ON TABLE	5/8"
MOTOR	5.2 Amp.
VOLTAGE	600V, 3 phase, 60 Hz
ASSEMBLED DIMENSIONS (LxWxH) / WEIGHT	65" x 58" x 85" / 2,750 lbs
PACKAGING DIMENSIONS (LxWxH) / WEIGHT	66-5/8" x 56-7/8" x 72-5/8" / 3,080 lbs
UPC	7 72995 01050 9

Specifications subject to change.